

# Socket outlet SCHUKO

1471460




## General information

Item number	1471460
Model	Socket outlet
Colour	grey

## Electrical parameters

Amperage	16A
Voltage	250V
Poles	2P + PE

## Standards/Directives

According to	DIN VDE 0620
Standard	SCHUKO
Certification marks	

## Operating conditions


Storage temperature	-25°C to +70°C
Operating temperature	-25°C to +40°C
Relative humidity	5 to 95%, no condensation
Degree of protection	Wall mounting IP41 , floor mounting IP 20

## Materials

Contact Carrier	PA
Housing	Thermoplast / zinc die-casting

## Connecting cable

Cross section	3x1,5mm <sup>2</sup> -3x2,5mm <sup>2</sup>
Cable diameter, dimension a	-
Insulation strip length sheath, dimension b	min. 20mm
Trim L/N, dimension c	0mm
Insulation strip length cores, dimension d	8-10mm




## Connection screws

Max. torque for screws L-N/PE	0,5 Nm
Screw drive L-N/PE	Combined slot/PZ1
Max. torque for screws housing	0,6/1 Nm
Screw drive housing	Combined slot/PZ1

## Additional technical information

Note	Cover with lid made of zinc die-casting, lower part made of thermoplastic with 2x cable entry M20. Suitable for dry cleaned rooms
------	--

Subject to modifications

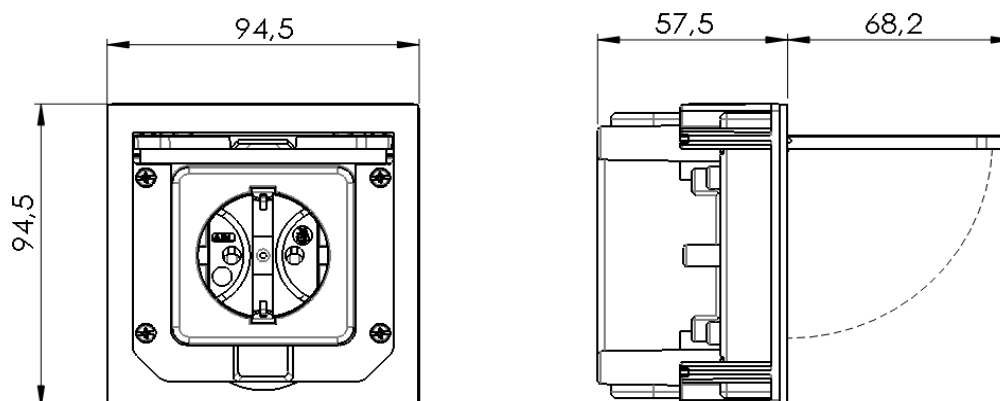

If the application requires extended specifications, we recommend to test the application under real or simulated conditions. Parameters like duration, quantity and temperature will effect the result significantly