

Housing

1632497



General information

Item number	1632497
Model	Housing
Colour	grey

Standards/Directives

Certification marks	EAC
---------------------	-----

Operating conditions

Storage temperature	-25°C to +70°C
Operating temperature	-25°C to +40°C
Relative humidity	5 to 95%, no condensation
Degree of protection	Wall mounting IP41 , floor mounting IP 20

Materials

Housing	PA
---------	----


Connection screws

Max. torque for screws housing	0,6/1 Nm
Screw drive housing	Combined slot/PZ1

Additional technical information

Note	Cover with lid made of zinc die-casting, lower part made of thermoplastic with 4x cable entry M20. Suitable for dry cleaned rooms
------	--

Subject to modifications

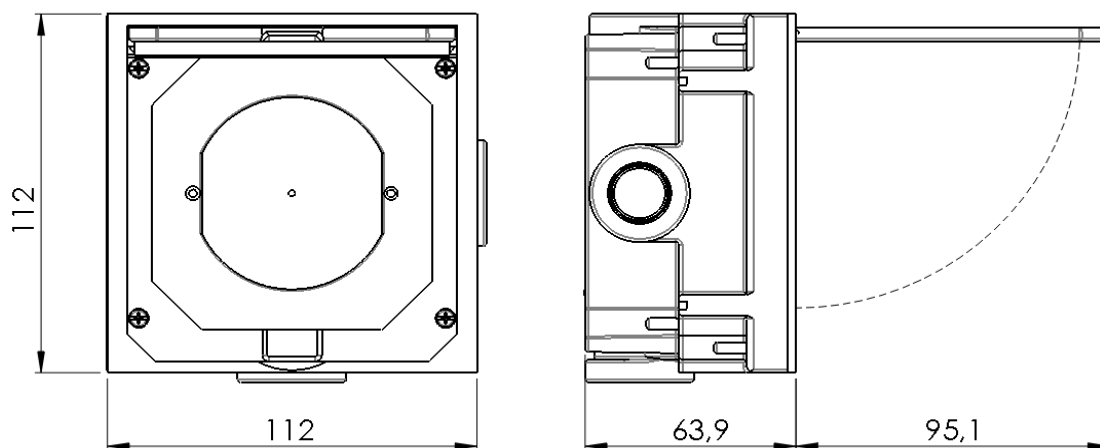

If the application requires extended specifications, we recommend to test the application under real or simulated conditions. Parameters like duration, quantity and temperature will effect the result significantly