# A32S22A

## CEE-flanged plug straight
## 30A · 3p · 250V · 6h · blue

Design may vary

- Housing material: PA6
- Nominal current: 32A / 30A
- Number of poles: 2P3W (3p)
- Clock position: 6 h
- Nominal voltage: 250 VAC
- Contacts: Brass
- Connection system: Screwed terminals
- Dimensions (flange/fixing center): 70 × 70mm / 56 × 56mm
- Protection degree: IP44
- Tested to UL1682 and IEC/EN 60309-2 (SERIES II)
- UL-product category: QLIW / QLIW7

### GENERAL

| | |
|---|---|
| Model | CEE-flanged plug straight, 32A |
| Product number | A32S22A |
| EAN number | 9003399247545 |
| Commodity code | 85366990 |
| Net weight product | 0.125 kg |
| Packaging unit (PU) | 10 units |
| Coding colour | Blue |

### ELECTRICAL PARAMETERS

| | |
|---|---|
| IEC amperage | 32 A |
| Amperage according to UL/CSA (for UL-version) | 30 A |
| Rated voltage | 250 VAC |
| Number of poles | 3 |
| Clock position | 6 h |

## OPERATING CONDITIONS

| | |
|---|---|
| Temperature resistance | -25 – 80 °C |
| IP rating | IP44 |

## MATERIALS

| | |
|---|---|
| Contact material | CuZn |
| Surface treatment contacts | Untreated |
| Housing material | Plastic |

## CONNECTION

| | |
|---|---|
| Construction type | Dedicated panel-mounted plug |
| Connection system | Screwed terminal |
| Contact screws | 110 Ncm |
| Angle of plug | Angled |
| Wire flexible | 2.5 – 6 mm² |
| Wire solid | 2.5 – 10 mm² |
| Jacket stripping length | 50 mm |
| Insulation stripping length | 12 - 14 mm |

## PRODUCT DIMENSIONS

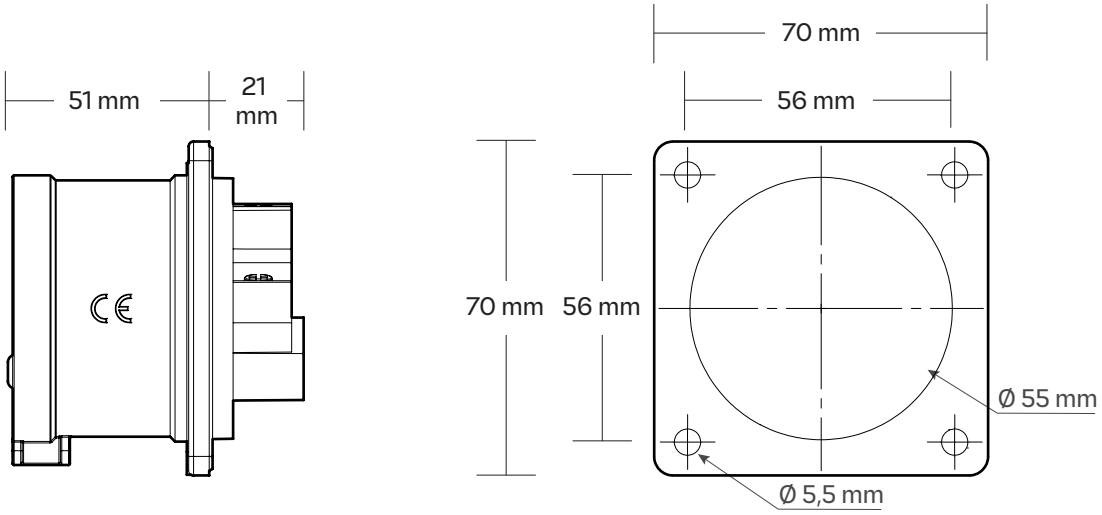


Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.