

# D32S21

CEE wall socket  
32A · 3p · 230V · 6h · blue

- Housing material: PA6
- Nominal current: 32 A
- Number of poles: 3 (2P+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200–250V~ / 50+60Hz
- Contacts: Brass
- Connection system: Screwed terminals
- Cable entry: Top and rear incl. threaded cable grommet
- Protection degree: IP44



Design may vary

## GENERAL

|                     |                      |
|---------------------|----------------------|
| Model               | CEE wall socket, 32A |
| Product number      | D32S21               |
| EAN number          | 9003399021145        |
| Commodity code      | 85366990             |
| Net weight product  | 0.270 kg             |
| Packaging unit (PU) | 10 units             |
| Coding colour       | Blue                 |

## ELECTRICAL PARAMETERS

|                                 |                       |
|---------------------------------|-----------------------|
| IEC amperage                    | 32 A                  |
| Voltage according to EN 60309-2 | 230 V (50+60 Hz) blue |
| Number of poles                 | 3                     |
| Clock position                  | 6 h                   |

**OPERATING CONDITIONS**

|                        |             |
|------------------------|-------------|
| Ambient temperature    | -25 – 40 °C |
| Temperature resistance | -25 – 80 °C |
| IP rating              | IP44        |

**MATERIALS**

|                            |           |
|----------------------------|-----------|
| Contact material           | CuZn      |
| Surface treatment contacts | Untreated |
| Housing material           | Plastic   |


**CONNECTION**

|                             |                          |
|-----------------------------|--------------------------|
| Construction                | Surface mounted          |
| Fixing type                 | Internal mounting        |
| Connection system           | Screwed terminal         |
| Cable entry                 | Gland nut                |
| Contact screws              | 110 Ncm                  |
| Housing screws              | 110 Ncm                  |
| Wire flexible               | 2.5 – 6 mm <sup>2</sup>  |
| Wire solid                  | 2.5 – 10 mm <sup>2</sup> |
| Jacket stripping length     | 50 mm                    |
| Insulation stripping length | 12 – 14 mm               |
| IK code *                   | IK08                     |

\* The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. Therefore, the IK codes of these products were determined in accordance with IEC 62262 and according to the test procedure of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40 °C and a relative humidity of 95%.



## PRODUCT DIMENSIONS

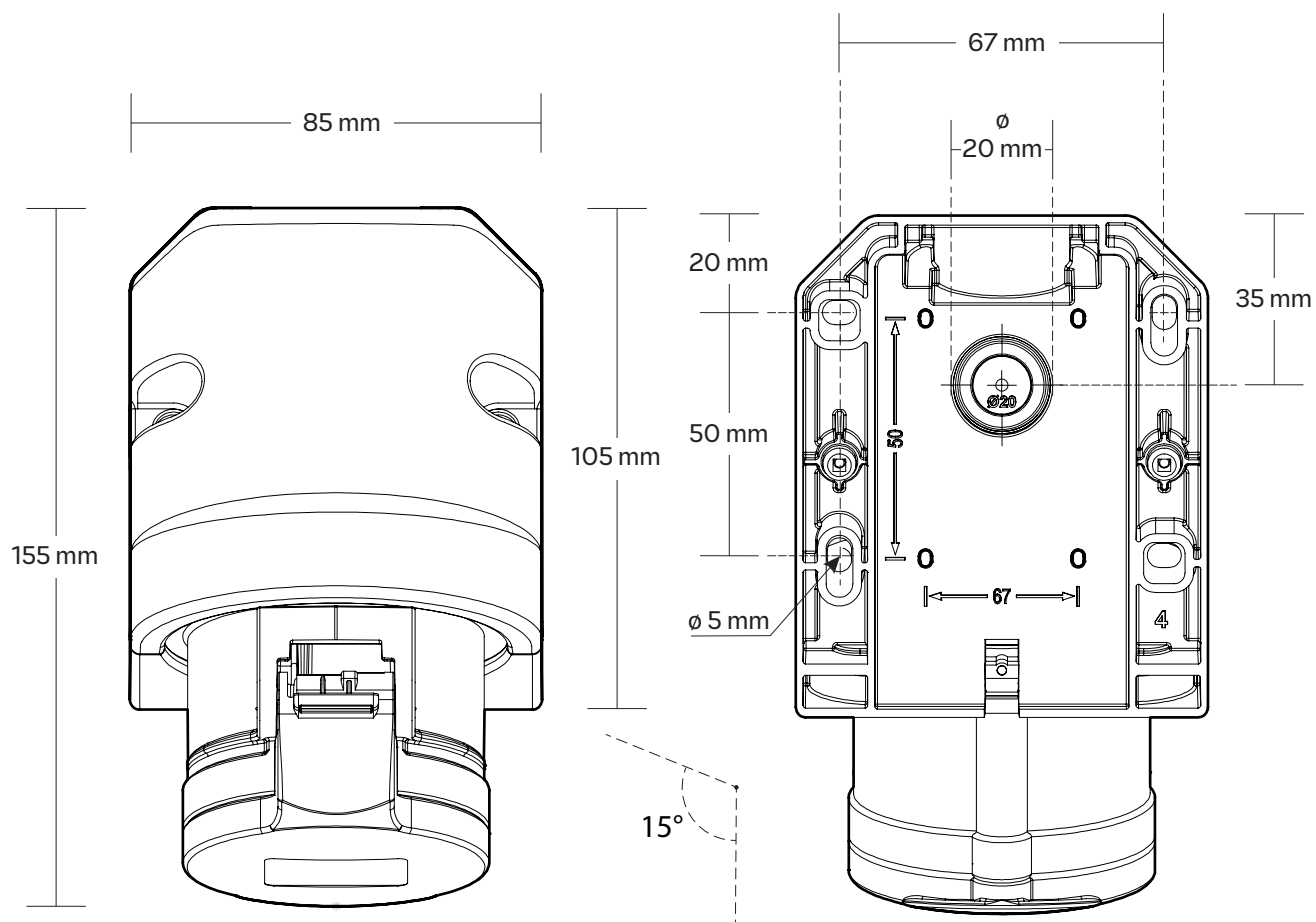

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.