

D51S331

CEE wall socket with feed-through
16A · 5p · 400V · 6h · red

- Housing material: PA6
- Nominal current: 16 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass
- Connection system: Screwed terminals
- Cable entry: Top, 2 × bottom or rear incl. threaded cable grommet
- Housing can be wired through
- Protection degree: IP44



Design may vary

GENERAL

Model	CEE wall socket with feed-through, 16A
Product number	D51S331
EAN number	9003399088599
Commodity code	85366990
Net weight product	0.322 kg
Packaging unit (PU)	10 units
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	16 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP44

MATERIALS


Contact material	CuZn
Surface treatment contacts	Untreated
Housing material	Plastic

CONNECTION

Construction	Surface mounted
Fixing type	Internal mounting
Connection system	Screwed terminal
Cable entry	Gland nut
Contact screws	100 Ncm
Housing screws	110 Ncm
Connecting screws	110 Ncm
Wire flexible	1 – 2.5 mm ²
Wire solid	1 – 4 mm ²
Jacket stripping length	50 mm
Insulation stripping length	10 – 12 mm



PRODUCT DIMENSIONS

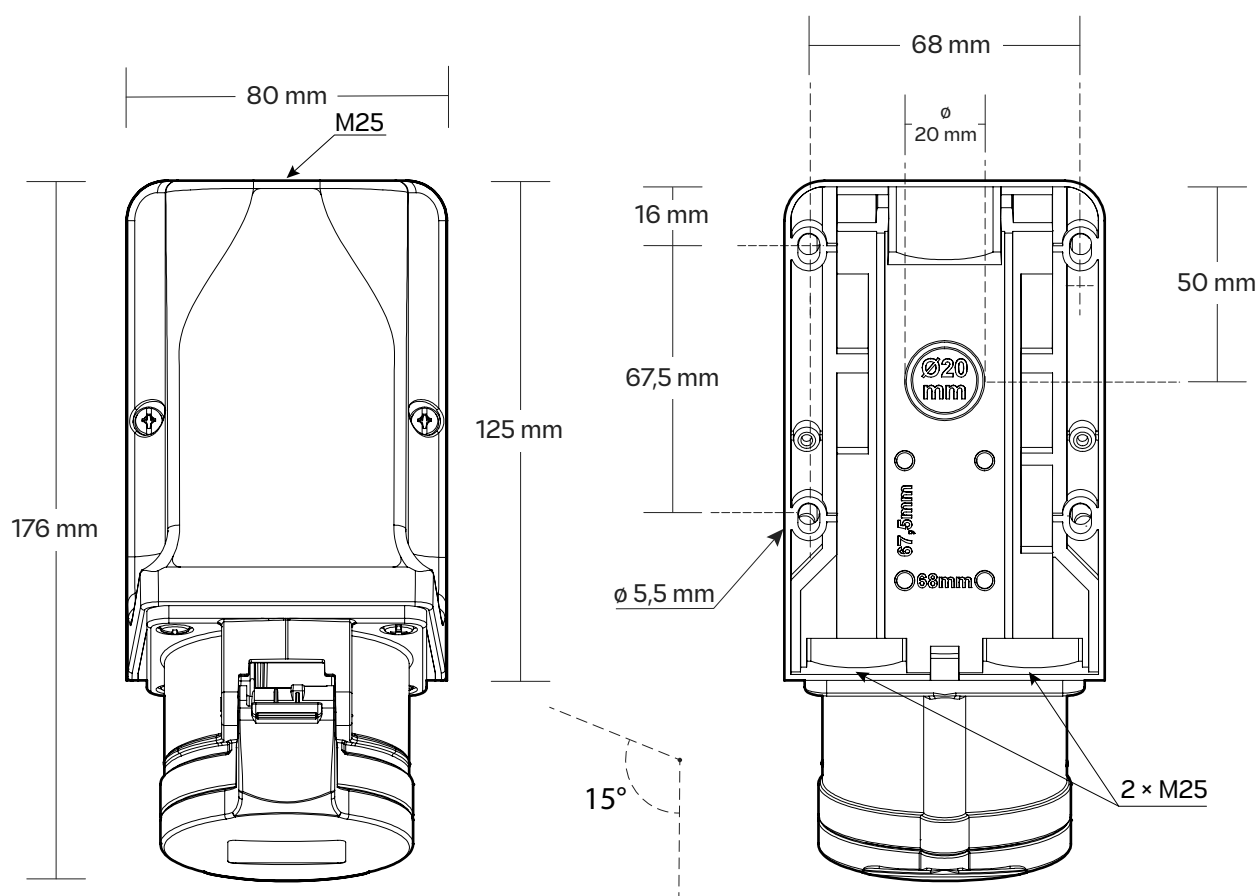

Height: 133 mm