

D52S31

CEE wall socket
32A · 5p · 400V · 6h · red

- Housing material: PA6
- Nominal current: 32 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass
- Connection system: Screwed terminals
- Cable entry: Top and rear incl. threaded cable grommet
- Protection degree: IP44



Design may vary

GENERAL

Model	CEE wall socket, 32A
Product number	D52S31
EAN number	9003399125065
Commodity code	85366990
Net weight product	0.315 kg
Packaging unit (PU)	10 units
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	32 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP44

MATERIALS

Contact material	CuZn
Surface treatment contacts	Untreated
Housing material	Plastic


CONNECTION

Construction	Surface mounted
Fixing type	Internal mounting
Connection system	Screwed terminal
Cable entry	Gland nut
Contact screws	110 Ncm
Housing screws	110 Ncm
Wire flexible	2.5 – 6 mm ²
Wire solid	2.5 – 10 mm ²
Jacket stripping length	50 mm
Insulation stripping length	12 – 14 mm
IK code *	IK09

* The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. Therefore, the IK codes of these products were determined in accordance with IEC 62262 and according to the test procedure of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40 °C and a relative humidity of 95%.



PRODUCT DIMENSIONS

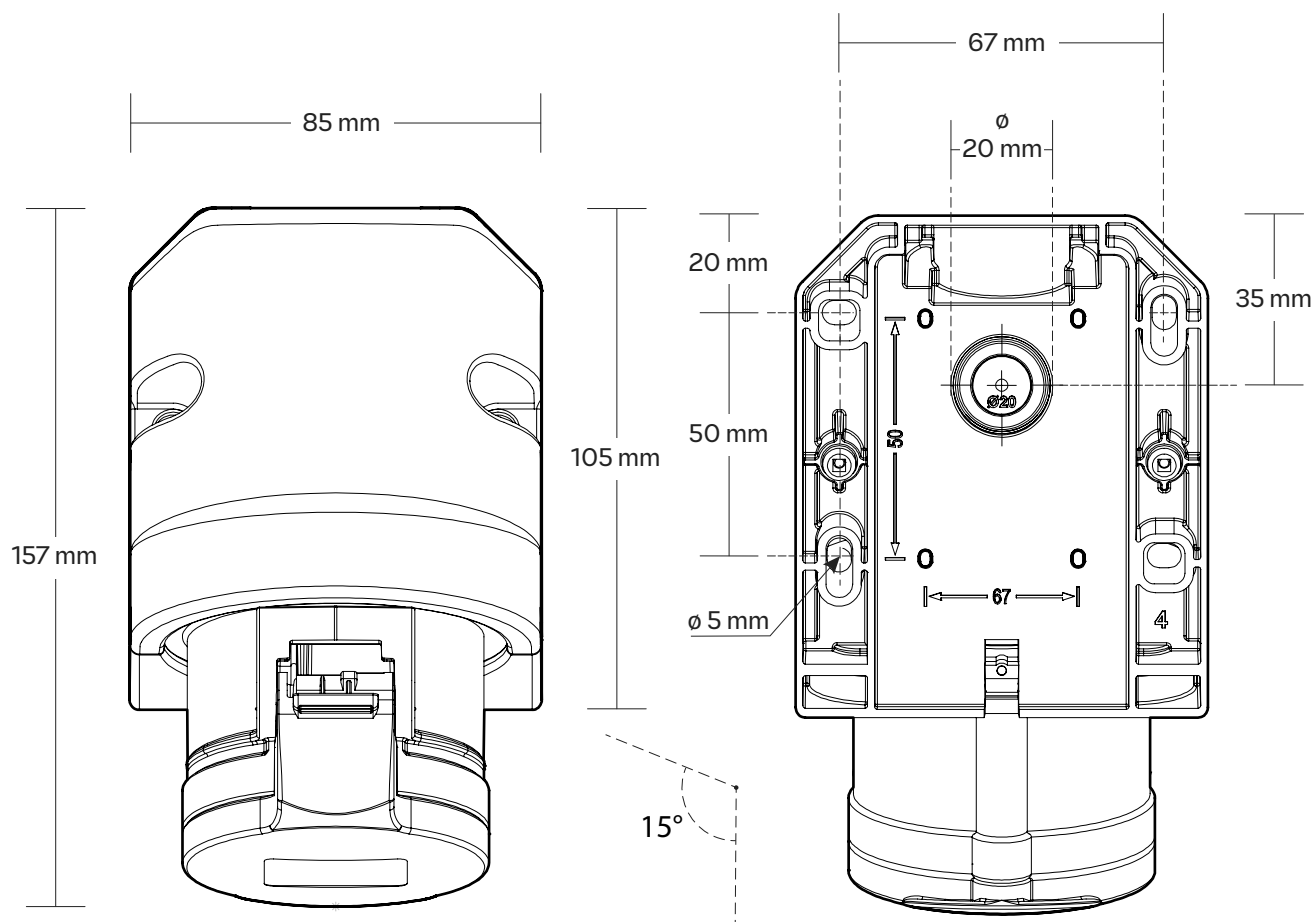

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.