

F52SL31

CEE-flanged socket straight
(75 × 75mm)
32A · 5p · 400V · 6h · red



- Housing material: PA6
- Nominal current: 32 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass
- Connection technology: Screwless terminals (TT)
- Dimensions (flange/fixing center): 75 × 75mm / 60 × 60mm
- Protection degree: IP44/IP54

Design may vary

GENERAL

Model	CEE-flanged socket straight, 32A
Product number	F52SL31
EAN number	9003399644436
Commodity code	85366990
Net weight product	0.211 kg
Packaging unit (PU)	10 units
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	32 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP54

MATERIALS


Contact material	CuZn
Surface treatment contacts	Untreated
Housing material	Plastic
Vertical flange dimension	75 mm
Vertical drill hole distance	60 mm
Horizontal flange dimension	75 mm
Horizontal drill hole distance	60 mm

CONNECTION

Connection system	Screwless terminal
Angle of plug	Straight
Wire flexible	2.5 – 6 mm ²
Wire solid	2.5 – 10 mm ²
Jacket stripping length	50 mm
Insulation stripping length	12 – 14 mm



PRODUCT DIMENSIONS

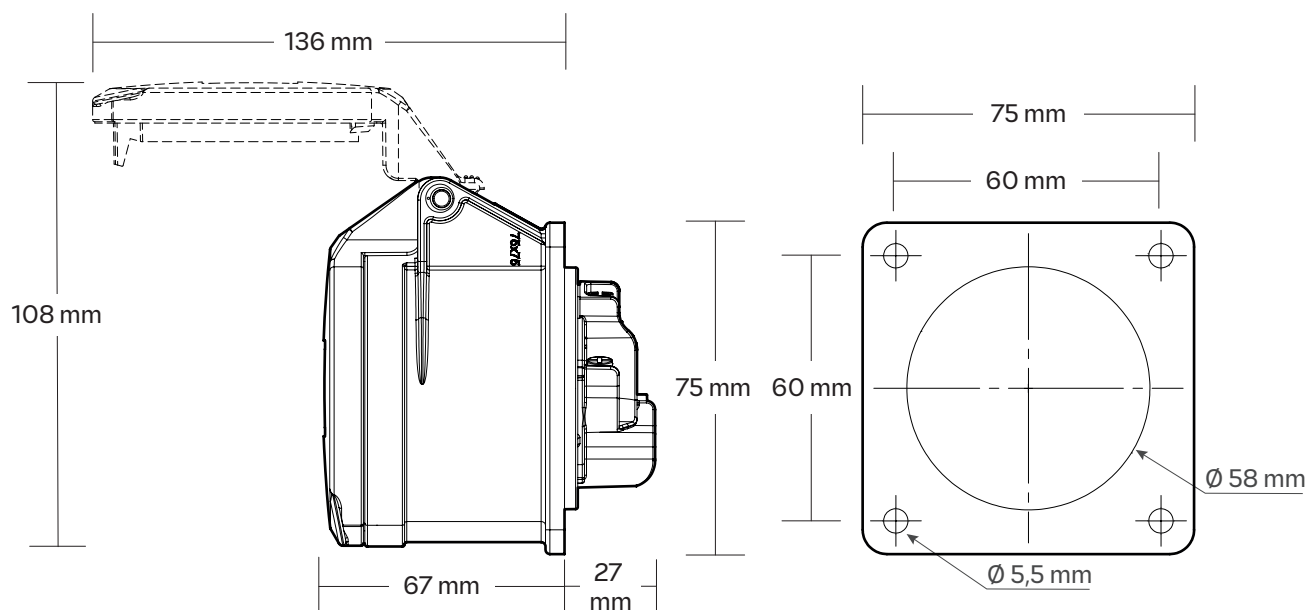

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.