

G52S30

CEE angle plug
32A · 5p · 400V · 6h · red

- Housing material: PC/ABS
- Nominal current: 32 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass
- Connection system: Screwed terminals
- Protection degree: IP44



Design may vary

GENERAL

Model	CEE angle plug, 32A
Product number	G52S30
EAN number	9003399818004
Commodity code	85366990
Net weight product	0.233 kg
Packaging unit (PU)	10 units
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	32 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP44

MATERIALS


Contact material	CuZn
Surface treatment contacts	Untreated
Housing material	Plastic

CONNECTION

Connection system	Screwed terminal
Cable entry	Gland nut
Contact screws	110 Ncm
Angle of plug	Angled (25°)
Wire flexible	2.5 – 6 mm ²
Cable diameter	11.5 – 22 mm
Jacket stripping length	50 mm
Insulation stripping length	12 – 14 mm
Strain relief	600 Ncm



PRODUCT DIMENSIONS

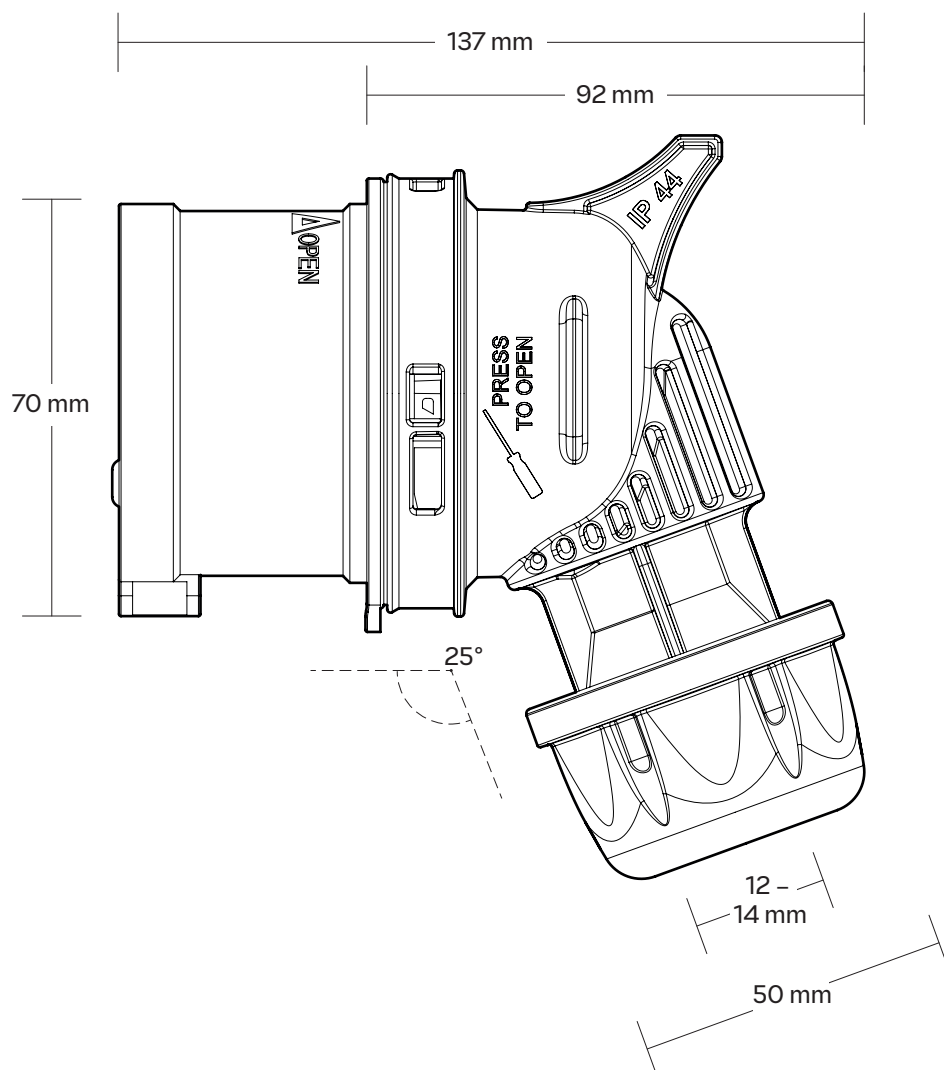

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.