

G54S35

CEE wall-mounted plug
125A · 5p · 400V · 6h · red

- Housing material: PC/ABS
- Nominal current: 125 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass nickel plated, with pilot pin
- Connection system: Frame terminals with screws
- Protection degree: IP66/IP67



Design may vary

GENERAL

Model	CEE wall-mounted plug, 125A
Product number	G54S35
EAN number	9003399068157
Commodity code	85366990
Net weight product	1.834 kg
Packaging unit (PU)	1 unit
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	125 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP67

MATERIALS

Contact material	CuZn
Surface treatment contacts	Nickel plated
Housing material	Plastic


CONNECTION

Construction type	Surface mounted device plug
Connection system	Screwed terminal
Contact screws	450 Ncm
Housing screws	200 Ncm
Connecting screws	200 Ncm
Angle of plug	Angled (15°)
Wire flexible	16 – 50 mm ²
Wire solid	16 – 70 mm ²
Jacket stripping length	100 mm
Insulation stripping length	24 – 27 mm
IK code *	IK09

* The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. Therefore, the IK codes of these products were determined in accordance with IEC 62262 and according to the test procedure of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40 °C and a relative humidity of 95%.



PRODUCT DIMENSIONS

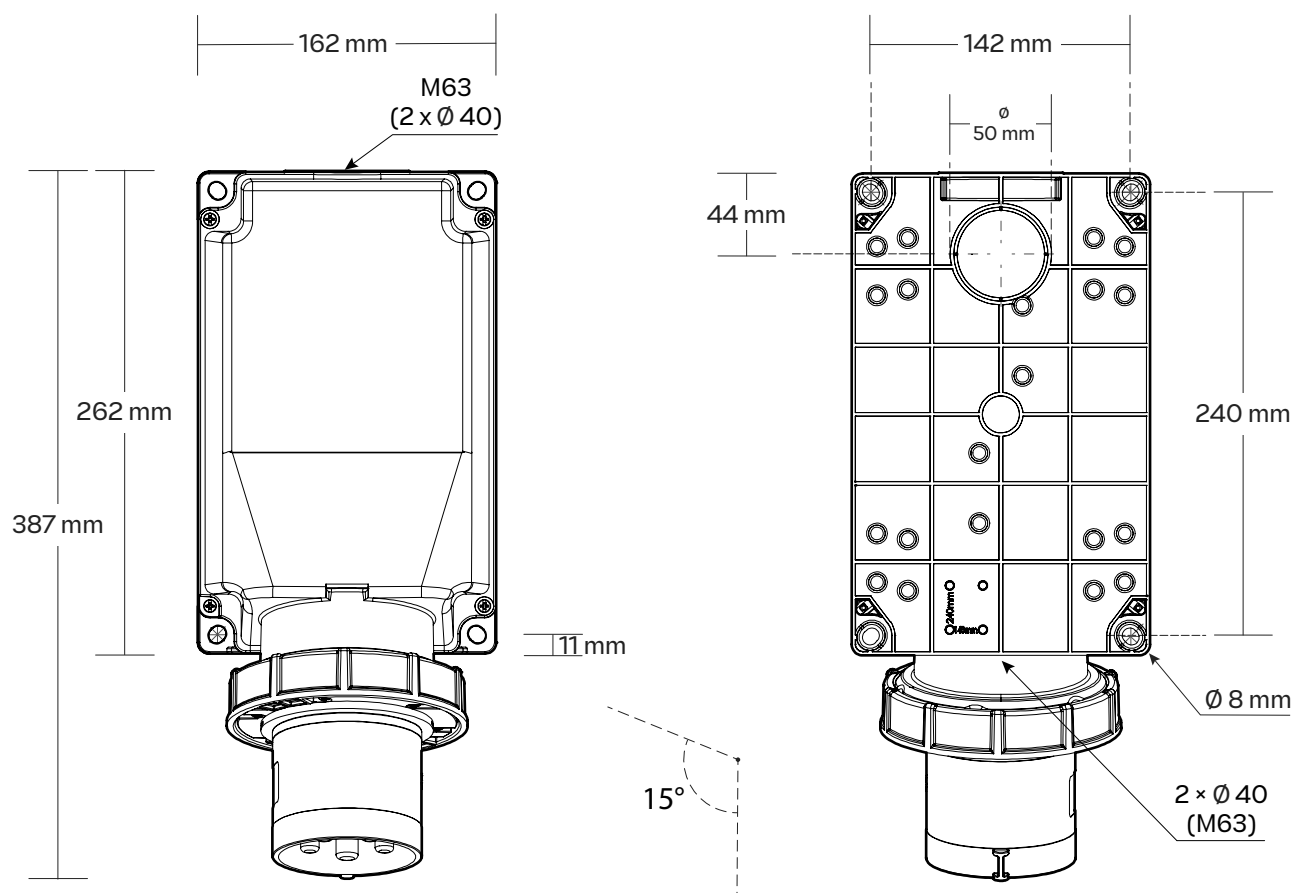

Height: 209 mm