

S32S20A

CEE plug straight
30A · 3p · 250V · 6h · blue



- Housing material: PA6
- Nominal current: 32A / 30A
- Number of poles: 2P3W (3p)
- Clock position: 6 h
- Nominal voltage: 250 VAC
- Contacts: Brass
- Connection system: Screwed terminals
- Protection degree: IP44
- Tested to UL1682 and IEC/EN 60309-2 (SERIES II)
- UL-product category: QLHN / QLHN7
- UL-file number: E232901

Design may vary

GENERAL

Model	CEE plug straight, 30A
Product number	S32S20A
EAN number	9003399075148
Commodity code	85366990
Net weight product	0.181 kg
Packaging unit (PU)	10 units
Coding colour	Blue

ELECTRICAL PARAMETERS

IEC amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	3
Clock position	6 h

OPERATING CONDITIONS

Temperature resistance	-25 – 80 °C
IP rating	IP44

MATERIALS


Contact material	CuZn
Surface treatment contacts	Untreated
Housing material	Plastic

CONNECTION

Connection system	Screwed terminal
Cable entry	Gland nut
Contact screws	110 Ncm
Angle of plug	Straight
Wire flexible	2.5 – 6 mm ²
Cable diameter	13.3 – 19.3 mm
Jacket stripping length	50 mm
Insulation stripping length	12 – 14 mm
Strain relief	700 Ncm



PRODUCT DIMENSIONS

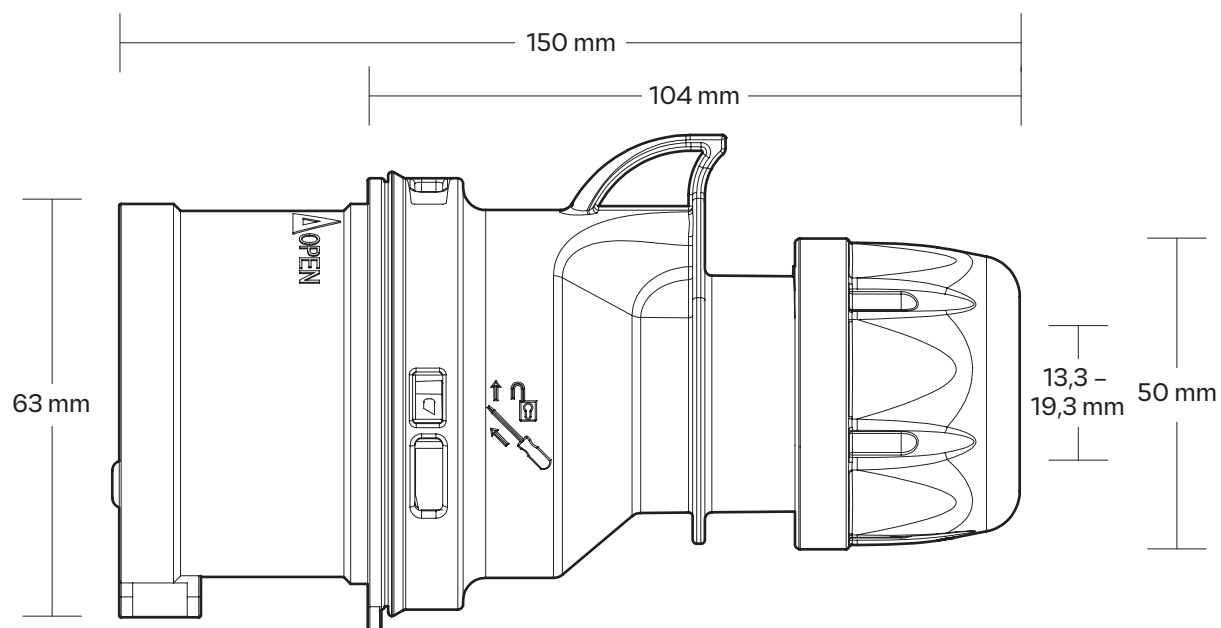

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.