

S51SL30

CEE plug straight
16A · 5p · 400V · 6h · red



- Housing material: PA6
- Nominal current: 16 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass
- Connection technology: Screwless terminals (TT)
- Protection degree: IP44/IP54

Design may vary

GENERAL

Model	CEE plug straight, 16A
Product number	S51SL30
EAN number	9003399230103
Commodity code	85366990
Net weight product	0.155 kg
Packaging unit (PU)	10 units
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	16 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP44

MATERIALS


Contact material	CuZn
Surface treatment contacts	Untreated
Housing material	Plastic

CONNECTION

Connection system	Screwless terminal
Cable entry	Gland nut
Angle of plug	Straight
Wire flexible	1.2 – 5 mm ²
Cable diameter	8 – 16 mm
Jacket stripping length	50 mm
Insulation stripping length	10 – 12 mm
Strain relief	500 Ncm



PRODUCT DIMENSIONS

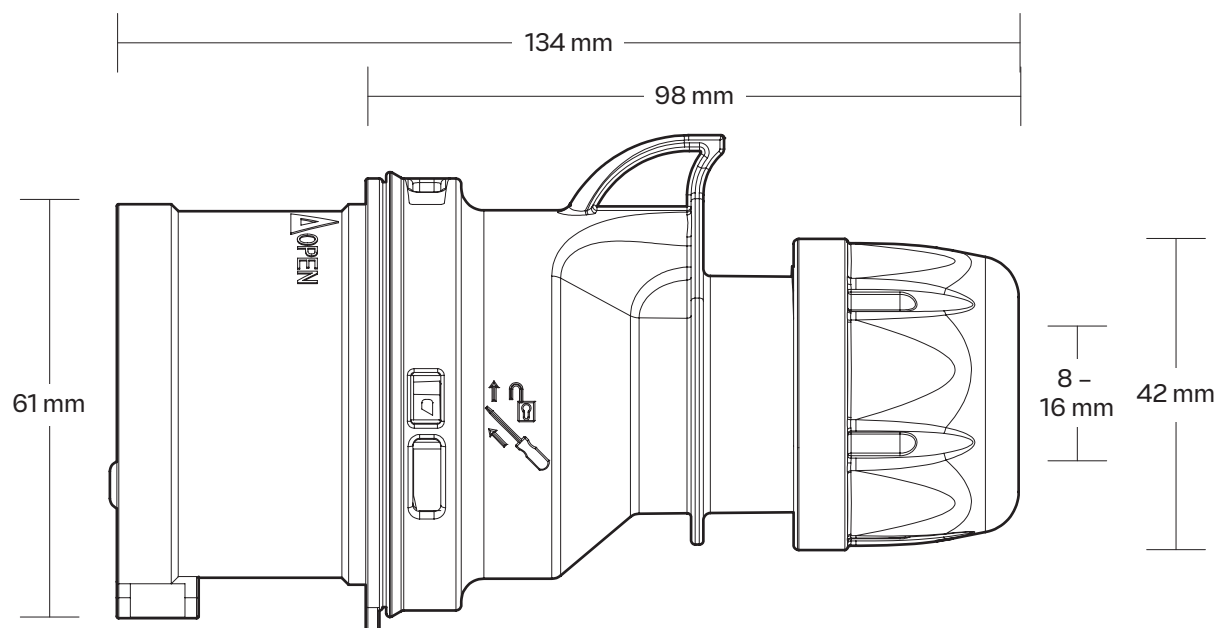

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.