

S52SL30

CEE plug straight
32A · 5p · 400V · 6h · red



- Housing material: PA6
- Nominal current: 32 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass
- Connection system: Screwless terminal (TT)
- Protection degree: IP44/IP54

Design may vary

GENERAL

Model	CEE plug straight, 32A
Product number	S52SL30
EAN number	9003399230127
Commodity code	85366990
Net weight product	0.241 kg
Packaging unit (PU)	10 units
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	32 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP44

MATERIALS


Contact material	CuZn
Surface treatment contacts	Untreated
Housing material	Plastic

CONNECTION

Connection system	Screwless terminal
Cable entry	Gland nut
Angle of plug	Straight
Wire flexible	2.5 – 6 mm ²
Cable diameter	11.5 – 22 mm
Jacket stripping length	50 mm
Insulation stripping length	12 – 14 mm
Strain relief	600 Ncm



PRODUCT DIMENSIONS

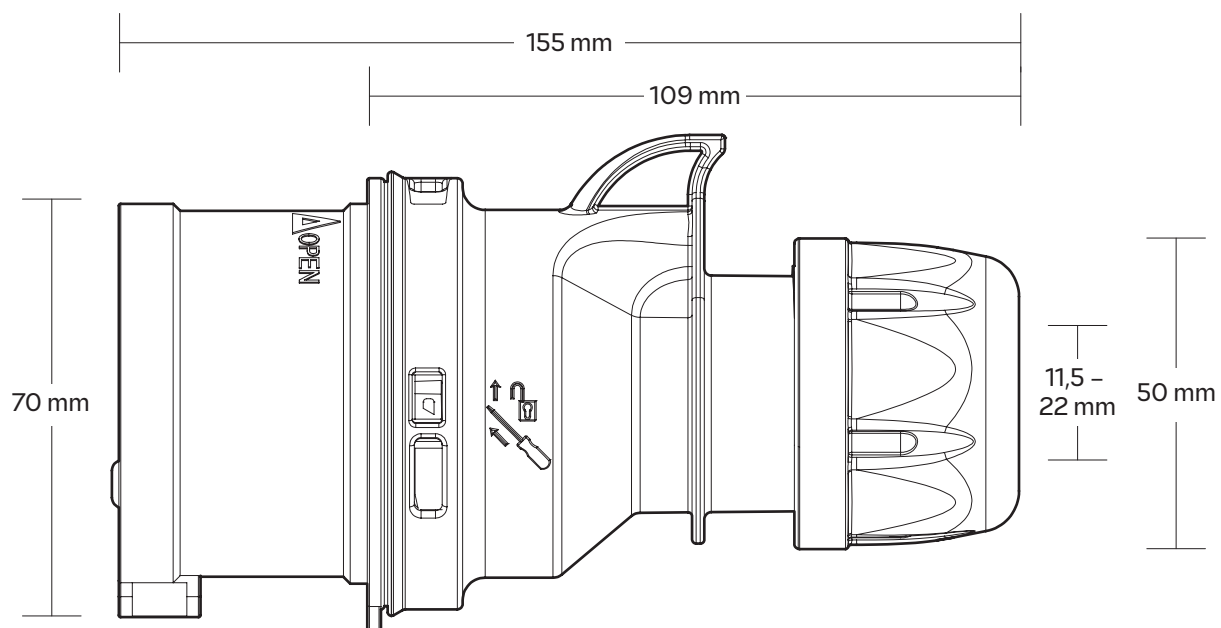

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.