

S53S30

CEE plug straight
63A · 5p · 400V · 6h · red



- Housing material: PA6
- Nominal current: 63 A
- Number of poles: 5 (3P+N+PE)
- Clock position: 6 h
- Rated voltage/frequency: 200/346V~ – 240/415V~ / 50+60Hz
- Contacts: Brass nickel plated, with pilot pin
- Connection system: Frame terminals with screws
- Protection degree: IP44

Design may vary

GENERAL

Model	CEE plug straight, 63A
Product number	S53S30
EAN number	9003399603068
Commodity code	85366990
Net weight product	0.621 kg
Packaging unit (PU)	2 units
Coding colour	Red

ELECTRICAL PARAMETERS

IEC amperage	63 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock position	6 h

OPERATING CONDITIONS

Ambient temperature	-25 – 40 °C
Temperature resistance	-25 – 80 °C
IP rating	IP44

MATERIALS


Contact material	CuZn
Surface treatment contacts	Nickel plated
Housing material	Plastic

CONNECTION

Connection system	Screwed terminal
Cable entry	Gland nut
Contact screws	200 Ncm
Connecting screws	200 Ncm
Angle of plug	Straight
Wire flexible	6 – 16 mm ²
Cable diameter	14.5 - 36 mm
Jacket stripping length	100 mm
Insulation stripping length	15 - 18 mm
Strain relief	1,500 Ncm



PRODUCT DIMENSIONS

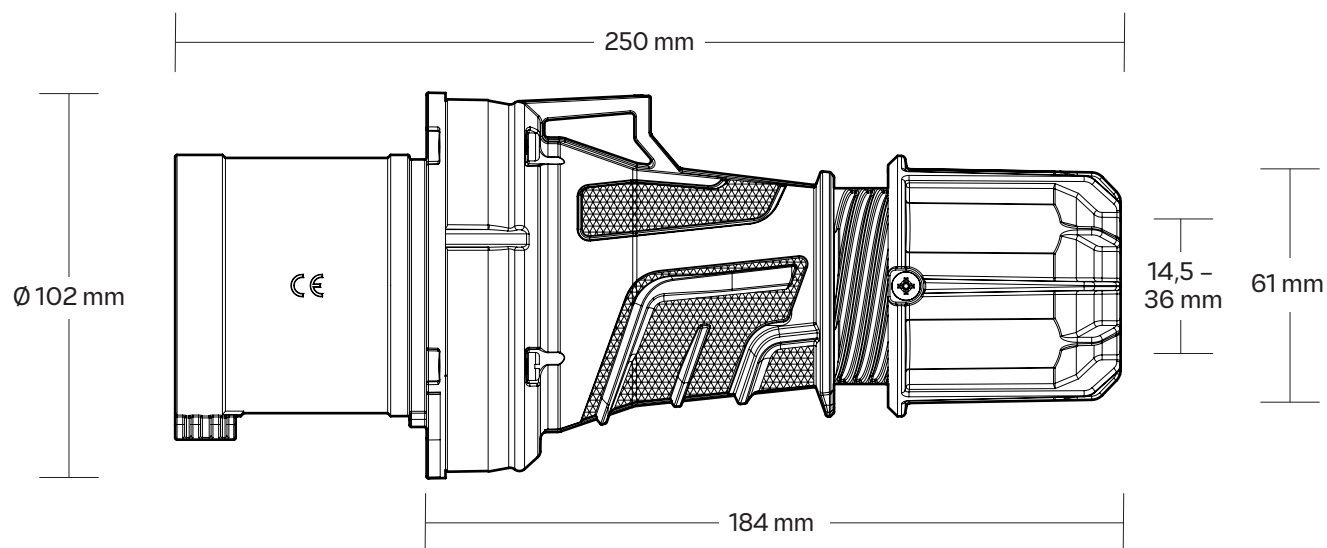

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.